

LUXLINE 

**TIRED
OF YOUR
LED
DRIVERS?**

— 24 ft

— 36 ft

— 48 ft

— 60 ft

— 72 ft

— 84 ft

— 96 ft

— 108 ft

— 120 ft

**YOUR LED RUN
DISTANCE SOLVED!**

LUXLINE VAC NO DRIVERS REQUIRED UP TO **164 FT**

Let your creativity run free with our driverless LED solution!

164 Ft
MAX

85+
CRI

120V
High Voltage

115
LM/W


DIMMABLE
ELV.

CUSTOM
ORDERS


ETL
Intertek


DRIVER


ROHS
COMPLIANT

By **LUMEN[®]**
Truss

Client : _____ Project / Projet : _____


Order # / Numéro de commande : _____ Qty/Qté : _____ Date : _____

HOW TO ORDER / COMMENT COMMANDER

Example of use / Exemple d'utilisation: **ST-13.2W / 120V - 2400K - 80 - 164 FT - 4W - 115 LM/W**

Strip / Ruban	Voltage	Color / Couleur	CRI	Length / Longueur	Wattage/FT W/Pied	Light efficiency / Efficacité lumineuse LM/W
ST-13.2W	120V 220V	2400K 3000K 4000K		up to 164 ft	4W/FT	115 LM/W 420 LM/FT 430 LM/FT 460 LM/FT

CERTIFICATIONS



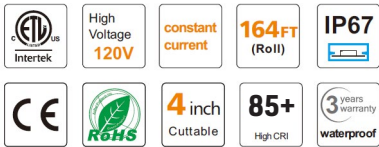


FEATURES / CARACTÉRISTIQUES


- 1. Constant current design.
- 2. Overvoltage protection.
- 3. The back of tape light without high voltage cables.
- 4. Each connecting point with terminals, easy connection.
- 5. Minimum cuttable in 4 inch.
- 6. 164 FT per roll.

ACCESSORIES / ACCESSOIRES

- 0409821 ENDCAP
- 0409822 ENDCAP WITH CABLES
- 0901004 MOUNTING CLIPS




OPTIONAL / OPTION

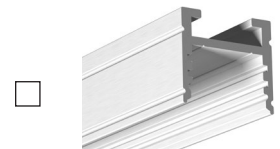


1450 Extrusion

CUSTOM OPTIONS / OPTIONS SUR MESURE

For simple connection option:
Min. connecting cord length 2in
Max. length 30ft



For 90° connection option:
Min. connecting cord length 3in
Max. length 30ft

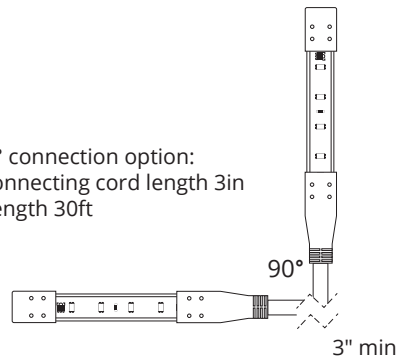



CUSTOM OPTIONS / OPTIONS SUR MESURE

IMPORTANT: Minimum cable length for 90° connection is 3 in
 Minimum cable length for simple connection is 2 in
 Maximum cable length is 36 in

